


DILATING DISK™ VALVE SPECIFICATION SHEETS

CV2 | CV20 | CV71 | CV308 | CV1345

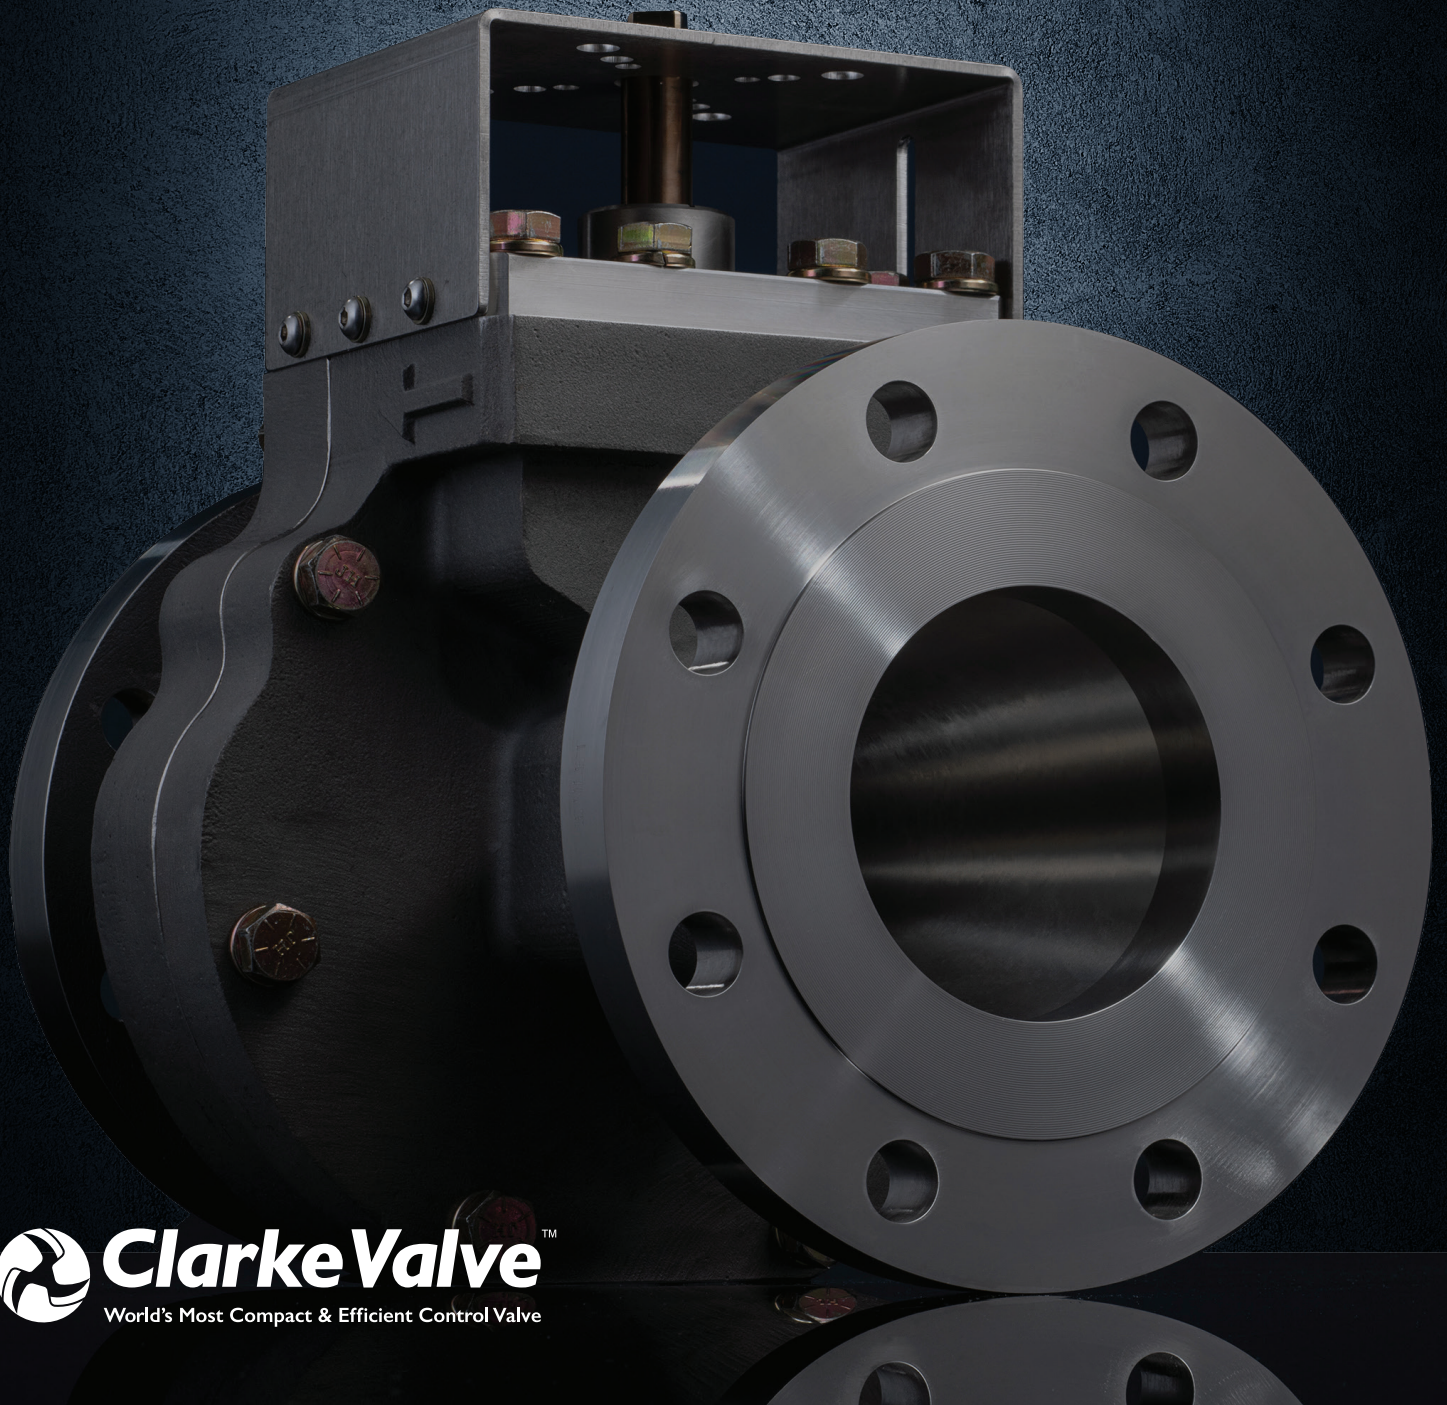


CV2 DILATING DISK™ VALVE


Flow Characteristics

% OPEN	C_v	K_v	F_L	X_T
10	0.00858	0.0074	0.99	0.63
20	0.04660	0.0400	0.96	0.53
30	0.11600	0.1000	0.90	0.44
40	0.23600	0.2040	0.87	0.40
50	0.45300	0.3920	0.84	0.40
60	0.76600	0.6630	0.75	0.44
70	1.20000	1.0380	0.60	0.50
80	1.55000	1.3410	0.48	0.48
90	1.85000	1.6000	0.41	0.40
100	2.00000	1.7300	0.37	0.33

What results does the Dilating Disk™ Valve deliver?

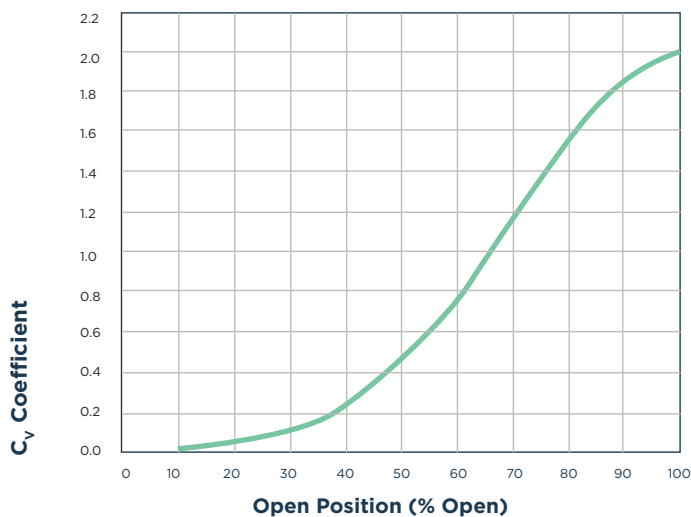


Market Comparison How does the Dilating Disk™ Valve compare?

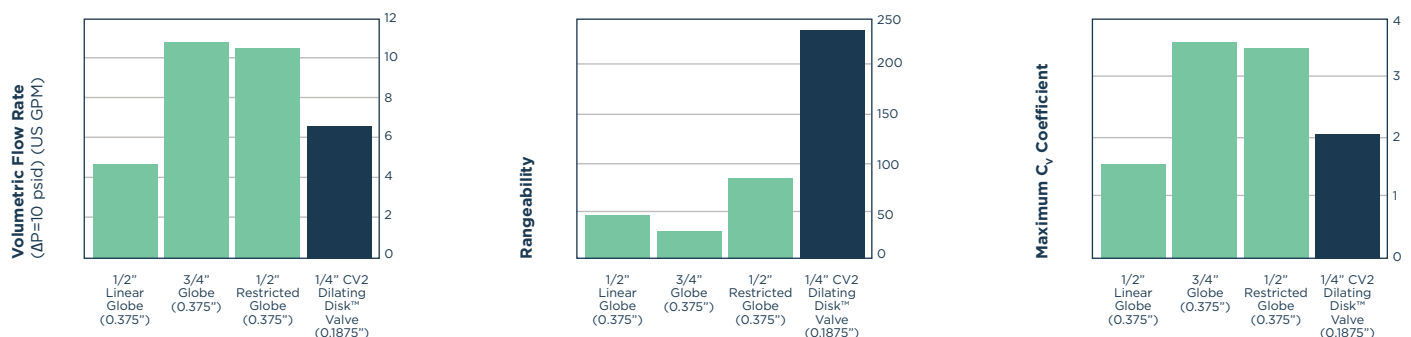

CV2 DILATING DISK™ VALVE

PRESSURE CLASS
150 - 1500

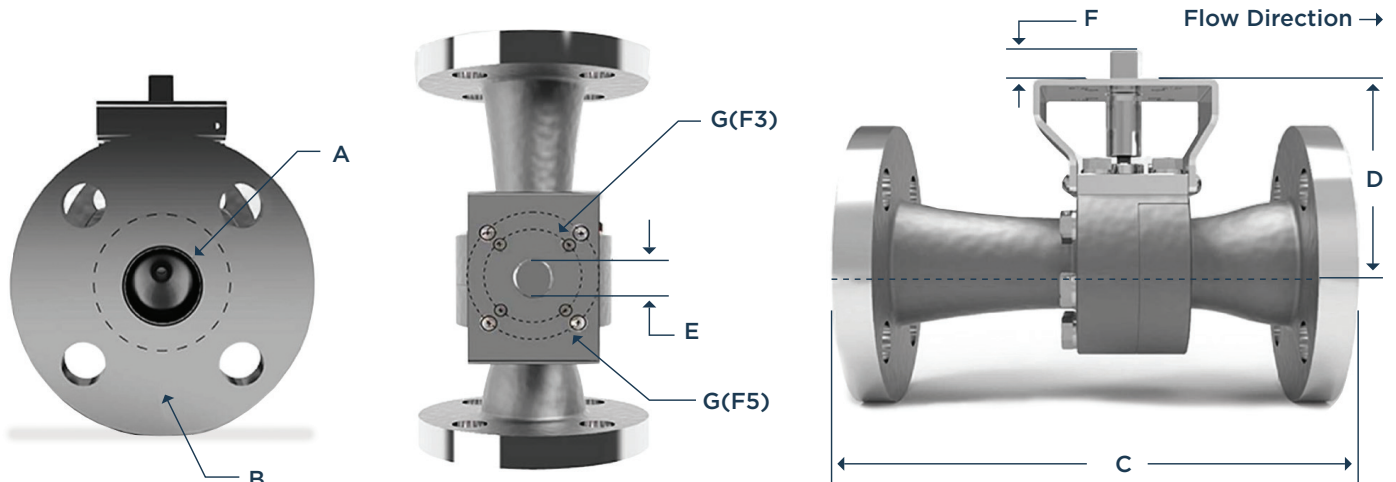



A		B	C	D	E	F	G	H	I
ASME B16.5 [NPS]		PRESSURE CLASS [ASME]	FACE TO FACE ISA 75.08 [IN]	CENTERLINE HEIGHT [IN]	DRIVE SQUARE WIDTH [IN]	DRIVE SQUARE HEIGHT [IN]	ISO 5211 YOKE PATTERN [IN]	WEIGHT [LBS]	MAST [IN-LBS]
NPT ONLY	0.25"	CL600	3.15	2.73	0.433	0.684	F3 - 1.417 F5 - 1.970	5	67
	0.50"	CL1500	3.15						
1.00"		CL150	7.25					9	
		CL300	7.75					12	
		CL600	8.25					13	
		CL1500	11.50					25	

CV20 DILATING DISK™ VALVE




Flow Characteristics

% OPEN	C_v	K_v	F_L	X_T
10	0.113	0.098	0.99	0.53
20	0.352	0.305	0.96	0.55
30	0.987	0.854	0.90	0.49
40	1.860	1.610	0.87	0.43
50	3.890	3.370	0.84	0.39
60	7.760	6.910	0.75	0.36
70	12.800	11.100	0.60	0.33
80	17.300	14.900	0.48	0.31
90	19.500	16.800	0.41	0.27
100	20.000	17.300	0.37	0.22

What results does the Dilating Disk™ Valve deliver?

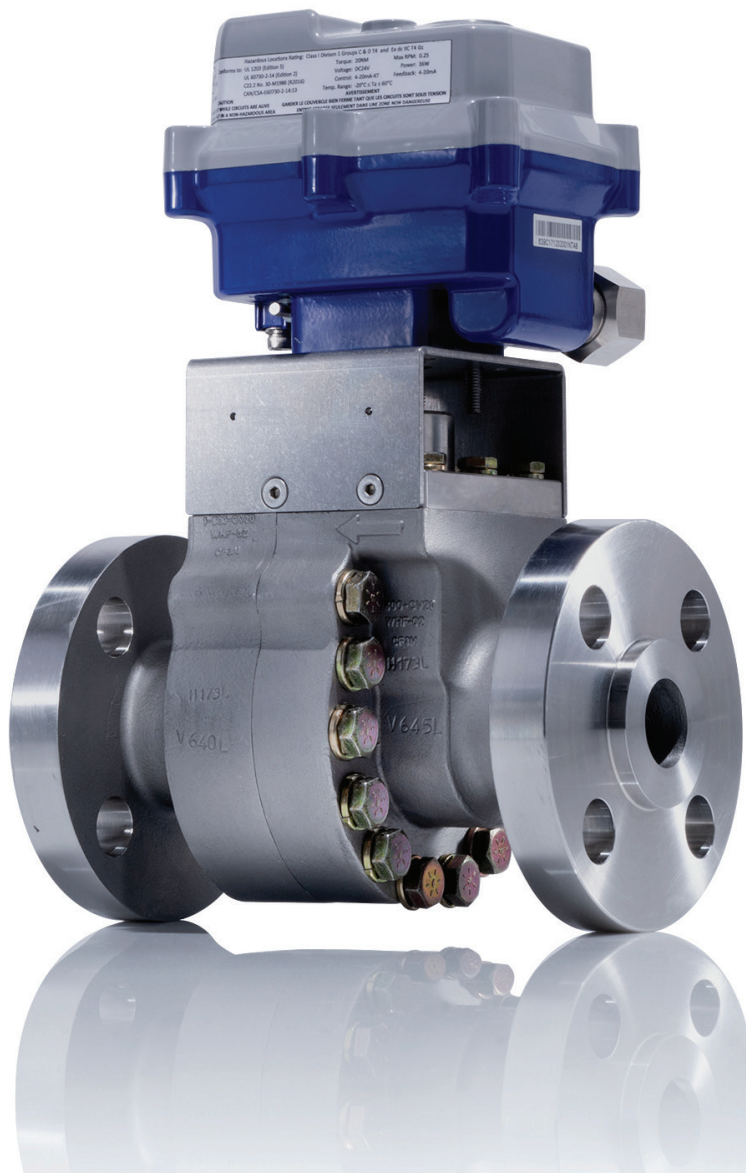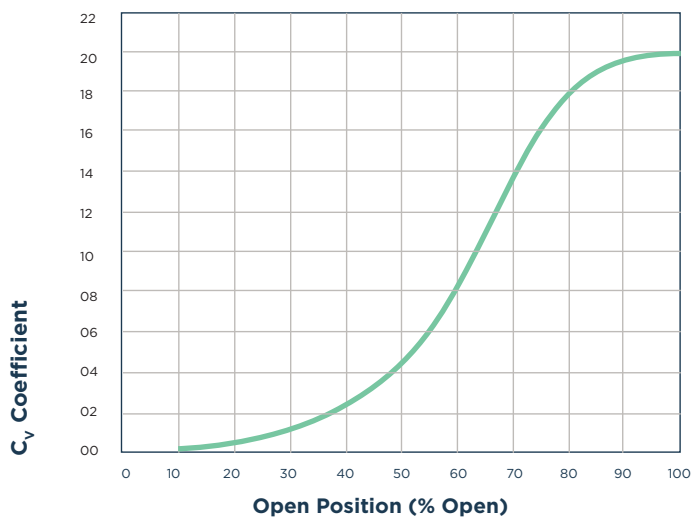


Market Comparison How does the Dilating Disk™ Valve compare?

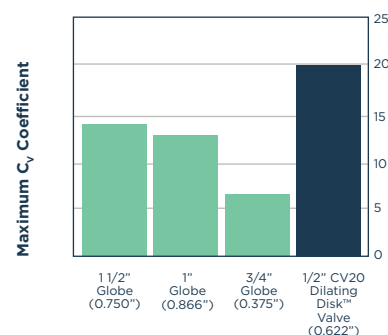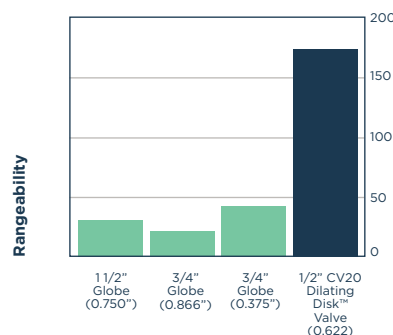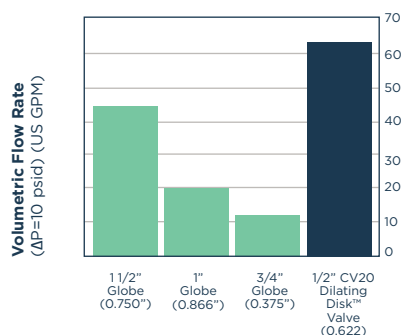

CV20 DILATING DISK™ VALVE

PRESSURE CLASS
150 - 1500

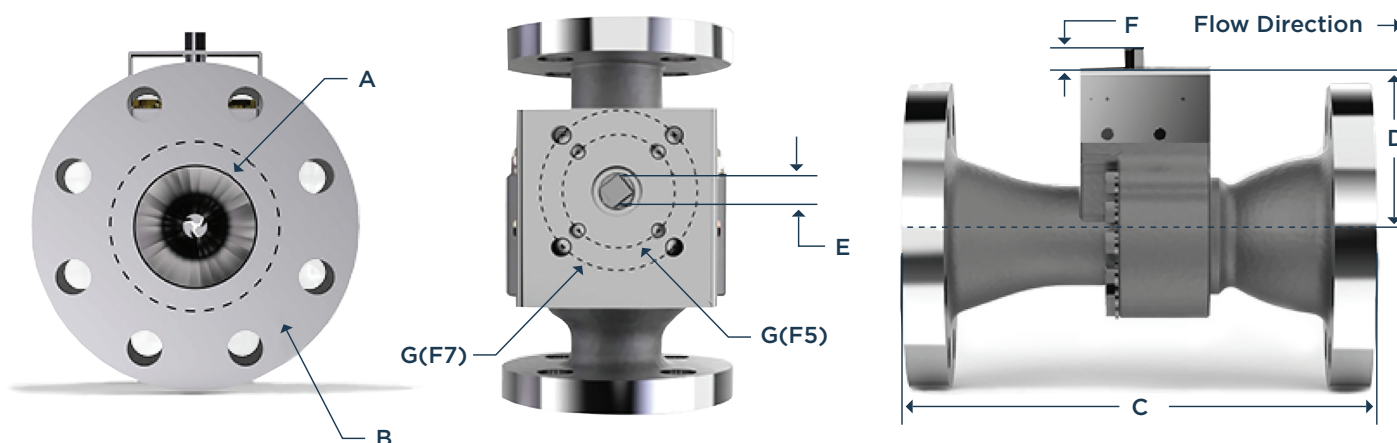

A	B	C	D	E	F	G	H	I
ASME B16.5 [NPS]	PRESSURE CLASS [ASME]	FACE TO FACE ISA 75.08 [IN]	CENTERLINE HEIGHT [IN]	DRIVE SQUARE WIDTH [IN]	DRIVE SQUARE HEIGHT [IN]	ISO 5211 YOKE PATTERN [IN]	WEIGHT [LBS]	MAST [IN-LBS]
0.75"	CL150	7.25	4.515	0.433	0.535	F5 - 1.97 F7 - 2.76	20	1656
	CL300	7.62					22	
	CL600	8.12					23	
	CL900	10.75					45	
	CL1500							
1.00"	CL150	7.25					21	
	CL300	7.75					24	
	CL600	8.25					25	
	CL900	10.75					50	
	CL1500							
1.50"	CL150	8.75					26	
	CL300	9.25					31	
	CL600	9.88					33	
	CL900	12.25					84	
	CL1500							
2.00"	CL150	10.00					32	
	CL300	10.50					36	
	CL600	11.25					39	
	CL900	14.75					84	
	CL1500							
3.00"	CL150	11.75					45	
	CL300	12.50					53	
	CL600	13.25					59	
	CL900	17.38					105	
	CL1500	18.12					129	


CV71 DILATING DISK™ VALVE

Flow Characteristics




% OPEN	C _v	K _v	F _L	X _T
10	0.40	0.346	0.99	0.45
20	1.25	1.080	0.96	0.65
30	3.50	3.030	0.90	0.61
40	6.60	5.710	0.87	0.65
50	13.80	11.900	0.84	0.61
60	27.60	23.800	0.75	0.57
70	45.50	39.400	0.60	0.41
80	61.40	53.100	0.48	0.27
90	69.10	59.700	0.41	0.16
100	71.00	61.400	0.37	0.15



What results does the Dilating Disk™ Valve deliver?

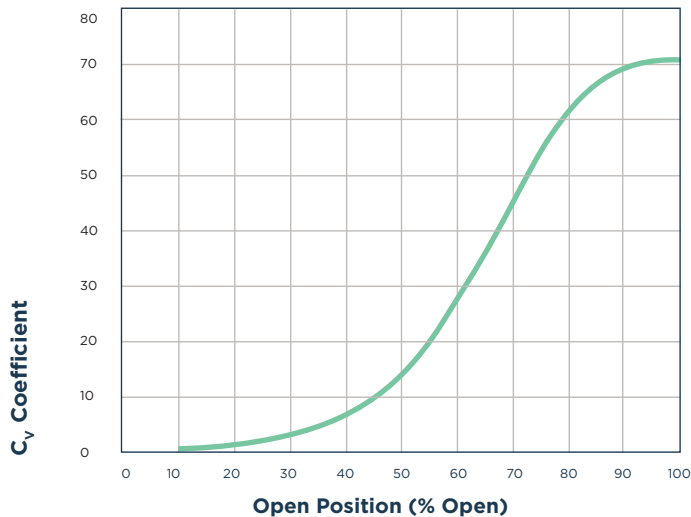


Market Comparison How does the Dilating Disk™ Valve compare?

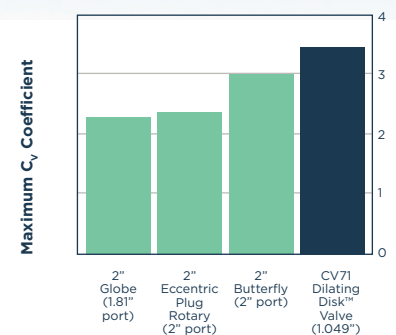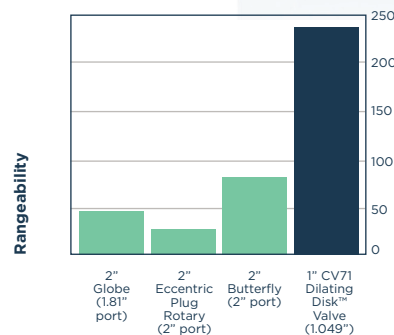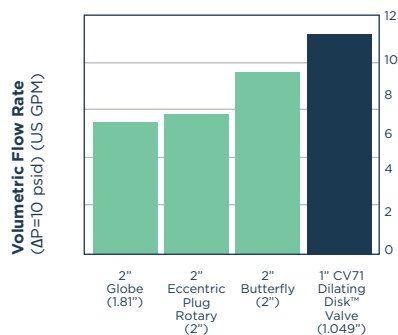

CV7I DILATING DISK™ VALVE

PRESSURE CLASS
150 - 1500

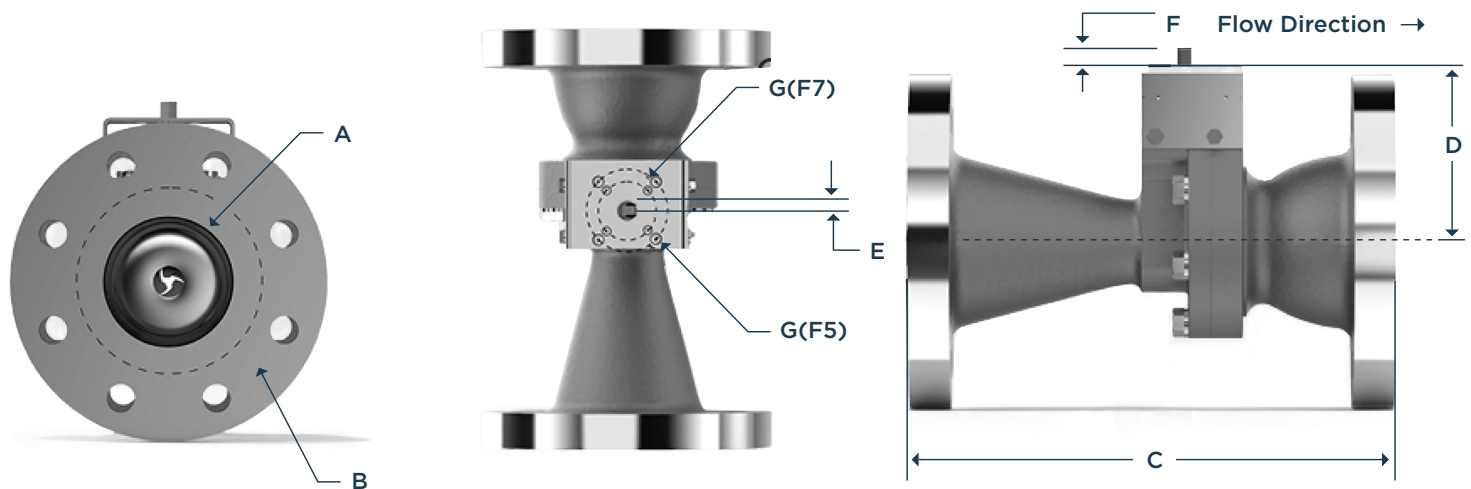


A	B	C	D	E	F	G	H	I
ASME B16.5 [NPS]	PRESSURE CLASS [ASME]	FACE TO FACE ISA 75.08 [IN]	CENTERLINE HEIGHT [IN]	DRIVE SQUARE WIDTH [IN]	DRIVE SQUARE HEIGHT [IN]	ISO 5211 YOKE PATTERN [IN]	WEIGHT [LBS]	MAST [IN-LBS]
1.5"	CL150	8.75	5.232	0.433	0.584	F5 - 1.97 F7 - 2.76	31	1522
	CL300	9.25					36	
	CL600	9.88					46	
	CL900	13.12					81	
	CL1500							
2.0"	CL150	10.00					35	
	CL300	10.50					39	
	CL600	11.25					52	
	CL900	14.75					103	
	CL1500							
3.0"	CL150	11.75					48	
	CL300	12.50					57	
	CL600	13.25					73	
	CL900	17.38					103	
	CL1500	18.12					149	
4.0"	CL150	13.88					62	
	CL300	14.50					80	
	CL600	15.50					117	
	CL900	20.12					147	
	CL1500	20.87					205	
6.0"	CL300	18.62					128	

CV308 DILATING DISK™ VALVE




Flow Characteristics

% OPEN	C_v	K_v	F_L	X_T
10	2.00	1.7	0.98	0.49
20	6.08	5.2	0.93	0.49
30	12.00	10.4	0.81	0.46
40	22.20	19.2	0.76	0.42
50	41.00	34.5	0.71	0.37
60	70.10	60.6	0.56	0.34
70	118.00	102.0	0.36	0.32
80	194.00	168.0	0.23	0.31
90	280.00	242.0	0.17	0.28
100	308.00	266.0	0.14	0.22


What results does the Dilating Disk™ Valve deliver?

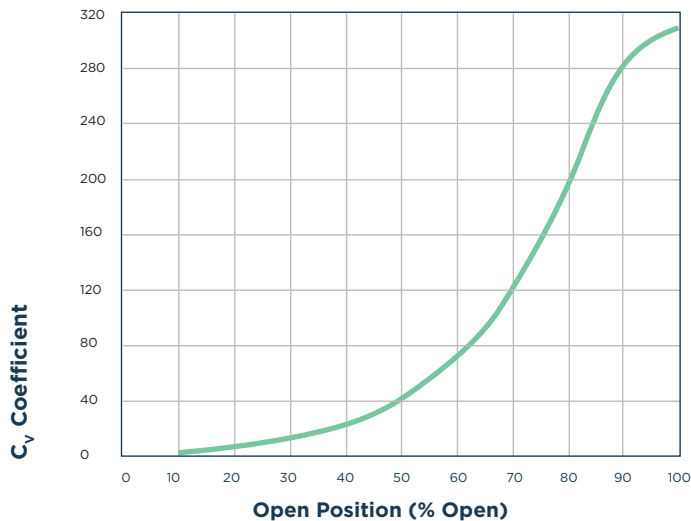

Market Comparison How does the Dilating Disk™ Valve compare?

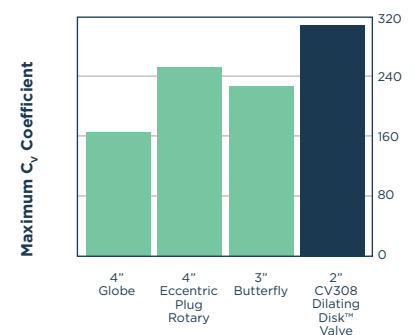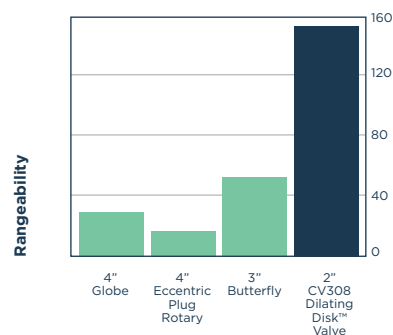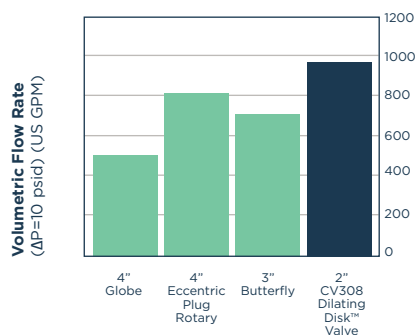

CV308 DILATING DISK™ VALVE PRESSURE CLASS 150 - 600

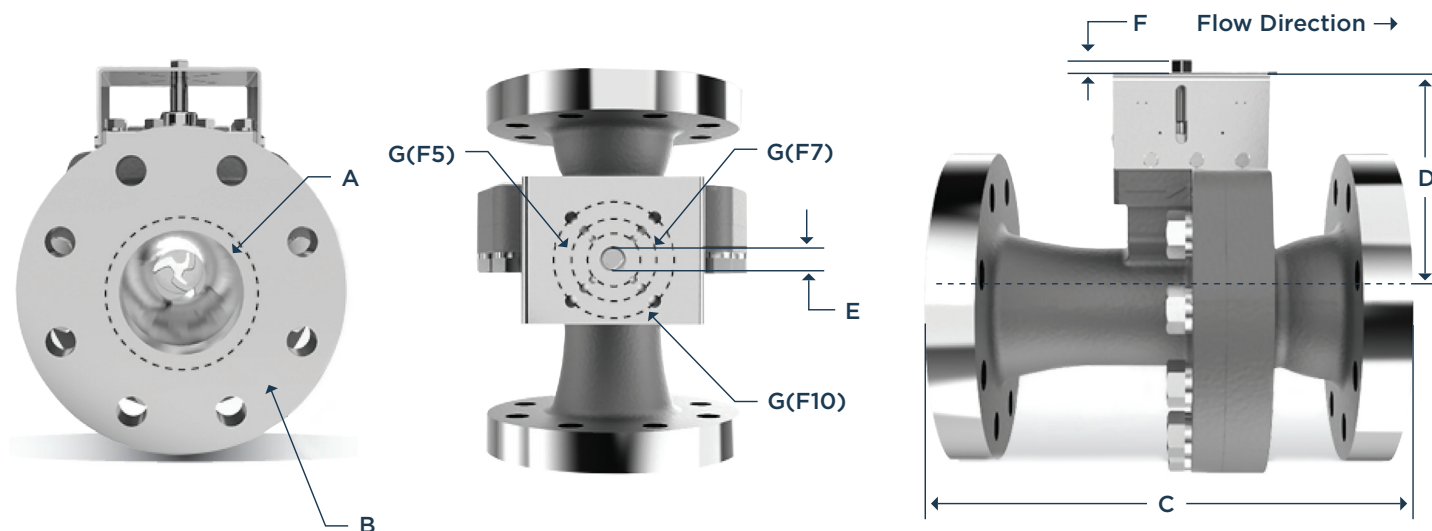


A	B	C	D	E	F	G	H	I
ASME B16.5 [NPS]	PRESSURE CLASS [ASME]	FACE TO FACE ISA 75.08 [IN]	CENTERLINE HEIGHT [IN]	DRIVE SQUARE WIDTH [IN]	DRIVE SQUARE HEIGHT [IN]	ISO 5211 YOKE PATTERN [IN]	WEIGHT [LBS]	MAST [IN-LBS]
3"	CL150	11.75	8.027	0.574	0.584	F5 - 1.970 F7 - 2.760 F10 - 4.016	87	2566
	CL300	12.50					100	
	CL600	13.25					127	
4"	CL150	13.88					99	
	CL300	14.50					122	
	CL600	15.50					170	
6"	CL150	17.75					131	
	CL300	18.62					172	
	CL600	20.00					248	

CVI345 DILATING DISK™ VALVE




Flow Characteristics

% OPEN	C_v	K_v	F_L	X_T
10	9	7.79	0.98	0.52
20	26	22.50	0.93	0.49
30	53	45.80	0.81	0.42
40	9	83.90	0.76	0.36
50	181	156.00	0.71	0.32
60	303	262.00	0.56	0.28
70	515	445.00	0.36	0.24
80	844	731.00	0.23	0.19
90	1220	1060.00	0.17	0.17
100	1345	1160.00	0.14	0.14

What results does the Dilating Disk™ Valve deliver?

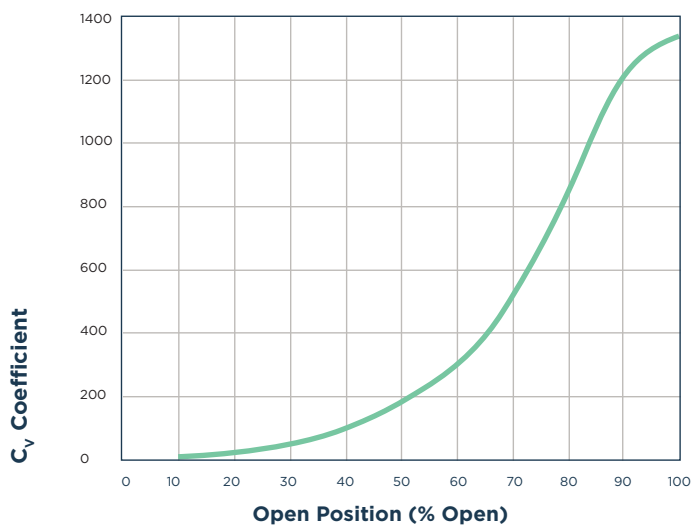


Market Comparison How does the Dilating Disk™ Valve compare?

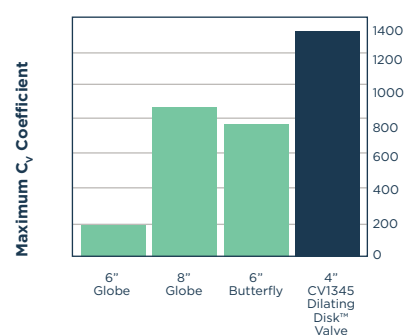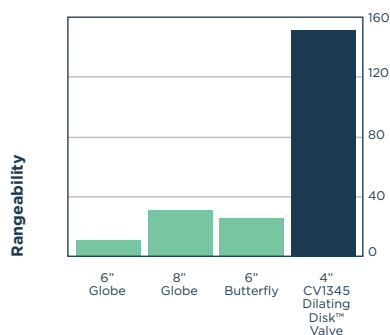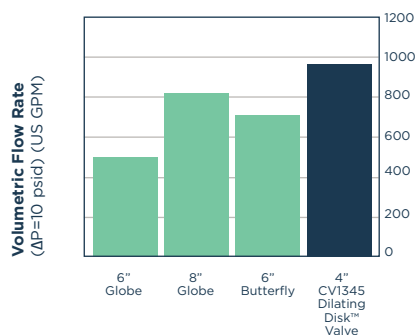

CVI345 DILATING DISK™ VALVE

PRESSURE CLASS
150 - 600

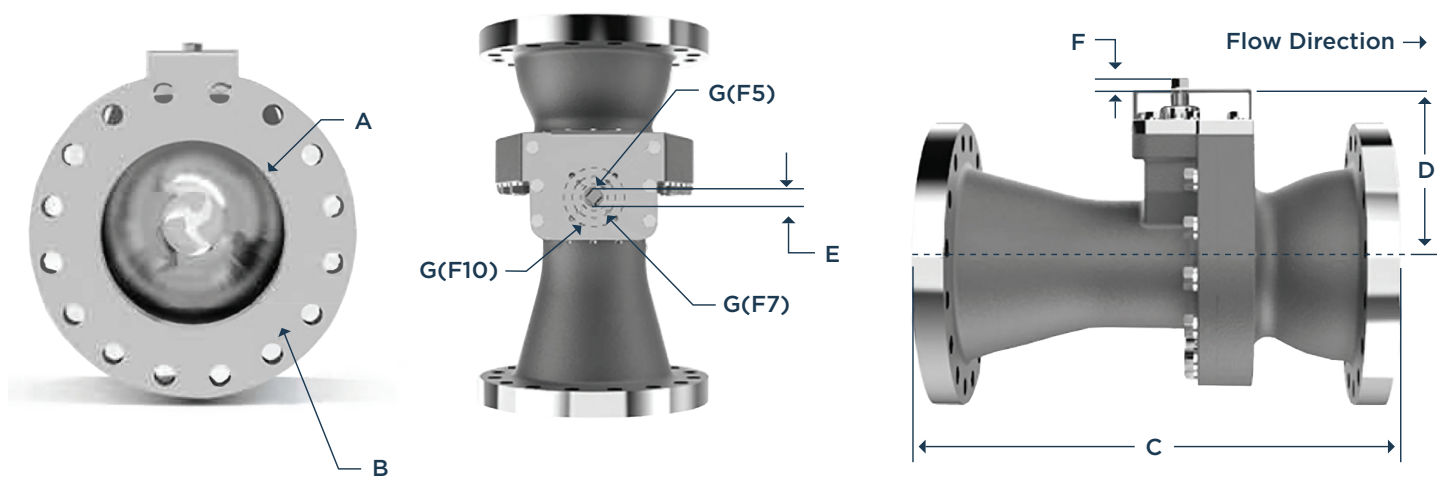

A	B	C	D	E	F	G	H	I
ASME B16.5 [NPS]	PRESSURE CLASS [ASME]	FACE TO FACE ISA 75.08 [IN]	CENTERLINE HEIGHT [IN]	DRIVE SQUARE WIDTH [IN]	DRIVE SQUARE HEIGHT [IN]	ISO 5211 YOKE PATTERN [IN]	WEIGHT [LBS]	MAST [IN-LBS]
6"	CL150	17.75	10.827	0.866	0.7	F5 - 1.970 F7 - 2.760 F10 - 4.016	312	8641
	CL600	18.62					361	
	CL300	20.00					443	
8"	CL150	21.38					370	
	CL300	22.38					441	
	CL600	24.00					535	
10"	CL150	26.50					458	
	CL300	27.88					551	
	CL600	32.35					717	
12"	CL150	29.00					542	
	CL300	30.50					665	
	CL600	32.25					819	



42 WHITECAP DRIVE
NORTH KINGSTOWN, RI 02852
SALES@CLARKEVALVE.COM

PHONE: (401) 667-7880
(800) 401-6618
FAX: (401) 667-0045

 **Clarke Valve**™
World's Most Compact & Efficient Control Valve